


C3

CANTILEVER DETAIL

23/32" OSB (or equal) Reinforcement Both Sides

APA Rated 23/32" OSB
(or equal) closure, or as
required by code

APA-rated 23/32"
OSB (or equal)
reinforcement both
sides, 4'-0" long
minimum

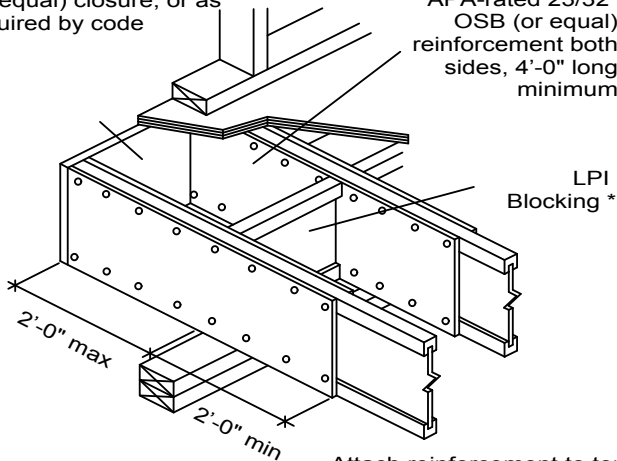

* LPI SolidStart Rim Board,
LVL or LSL may be substituted
for the LP Blocking

Attach reinforcement to top
and bottom flanges with
8d nails at 6" o.c. both sides
with nails staggered to avoid splitting